

Congratulations on your purchase of the **COVER•UP X** cover removal system. We at Coverplay Inc. are sure you will get years of trouble-free use from our product. A number of U.S. patented engineering features make this product safe and easy to operate. Please take the time to read the instructions before assembling the **COVER•UP X** as this should make the task much easier. *Thank You!*

Tools Needed:


- * Power drill/driver with a #2 Phillips head
- * 1/8" drill bit, 5/32" drill bit
- * Measuring Tape
- * Pencil

Parts List: (Reference Diagram B)

- 2 --- Grab Bars w/Foam Grips & O-rings (GB)
- 2 --- Spreader Bars (SB) with Extender Bar (EB)
- 2 --- Pending Arms (PA) w/VersaMount Bkts. (VB)
- 2 --- Safety Cables with Swivel Post Mounts (SC)
- 1 - Bag of screws containing 12 flat head screws, 8 pan head stainless screws and 12 #8 hard self-drilling screws, 2 stainless machine screws and washers. (some extra screws provided)


Stainless screws are softer than zinc steel so use your drill/driver with care and accuracy.


VersaMount bracket 7" away from the square corner of the spa.

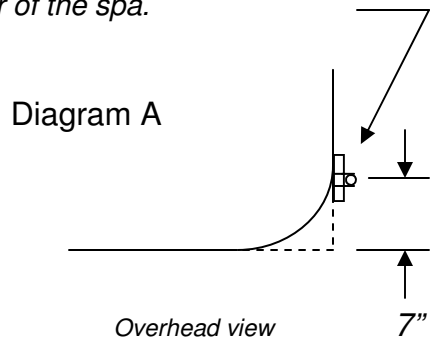

- 1) Begin by centering the **Spa Cover** on the spa and measure the width of the cover at the fold.
- 2) Remove the 2 longer **Spreader Bars** from the box and evenly insert the smaller **Extender Bar** into each one to make one long bar equal to the width of the cover at the fold. (Place on mat or rug for drilling)
- 3) Use the spreader pilot holes to pre-drill 5/32" holes in the extender bar and secure with 4 self drilling screws for a **Spreader Assembly**. (Covers under 75" wide may need to shorten one spreader with a saw)
- 4) Slip **Foam Grips** onto the short ends of each **Grab Bar** to the bend, (soapy water helps) and insert one short end into each end of the **Spreader Assembly**. On the mat, align and Pre-drill 5/32" holes through pilot holes and install 2 self-drilling screws to secure each **Grab Bar** to the **Spreader Assembly**. Place this assembly at the fold of the spa cover. (Diagram C)
- 5) Loop a **Safety Cable** over each **Pending Arm**.
- 6) Slide the O-rings up to align the flat keyway sides and slide the **Pending Arms** onto the **Grab Bars**. Place **VersaMount** brackets at the end of the spa where the cover will be stored **approximately 7"** in from the square corner. (Diagram A)

Diagram B

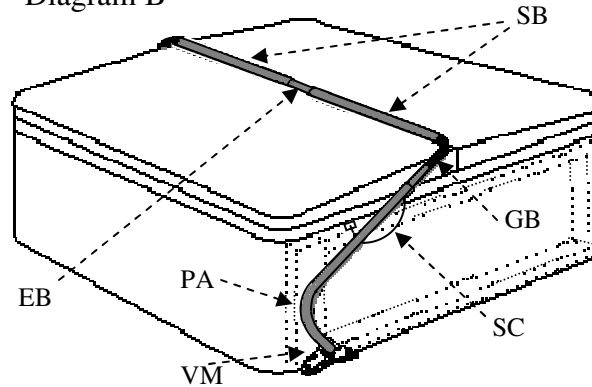

Cut along line and mail 

----->

Owners Name: _____ Date / / _____

Address: _____

City: _____ State: _____ Zip: _____

Phone: _____ Purchase Price: _____

Dealer Name: _____ Phone: _____

How did you hear about the **COVER•UP X**?

Dealer Magazine Internet Other

Decide cabinet mount or deck mount, then mark the **VersaMount** bracket holes

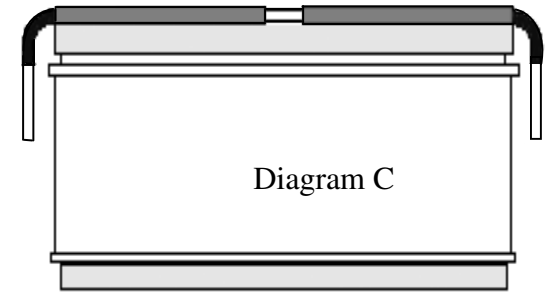


Diagram C

accordingly, making sure they are equally measured and install each VersaMount with the flat head stainless screws provided.

- 7) With the Spreader Assembly at the spa cover fold, secure the **Pending Arms** to the **Grab Bars** by drilling 5/32" holes through pilot holes provided and installing self-drilling screws. Slide the O-rings down the Grab Bars to meet the top of the Pending Arms for aesthetics.
- 8) Fold the spa cover over this assembly and store it upright at the end of the spa. While holding the cover in this position, (*an assistant helps here*), extend the **Safety Cable** mount plate to the upper frame of the cabinet, and mark the position of the holes to be drilled. When cover is stored, **Safety Cables** should be slack and horizontal to the floor.
- 9) Return the cover to the spa, (*easier to install the swivel posts*), and pre-drill 1/8th" pilot holes to prevent cabinet cracking, then install with the pan head screws provided. (*Take care not to over-tighten these screws*)

Notes:

Your **COVER•UP X** cover removal system offers adjustable positioning of the stored cover. Locating the VersaMount™ brackets farther away from the corners of the spa cabinet will continue to lower the stored cover.

COVER•UP X is equipped with "Halo" torsion springs. For the spring to assist in both directions, install the machine screw and washer in the threaded hole provided when the cover is in the stored upright position. The springs should then support the lift bar slightly above the cover eliminating continuous contact.

The **COVER•UP X** cover removal system is designed to be used with most spas and new spa covers today. If you have a question regarding your application, please contact your **COVER•UP X** dealer or distributor.

Mounting Plates are available to slide under the spa as an optional installation feature.

Stabilizer Straps eliminate rear side squeeze buckle attachment and detachment for more energy efficiency and convenience.

Installation Tip:

Apply a little silicone spray to the edge of the acrylic spa where the cover slides off to reduce the friction for easier cover removal.

Your **COVER•UP X** system is now ready to use.

Ask Your Dealer about our options!

COVER•UP X is a U.S. Patented product of Coverplay, Inc.

www.coverplay.com

COVER•UP X™
Lifetime Limited Warranty

A **COVER•UP X** cover removal system or component thereof, found by the manufacturer to be unserviceable due to defects in workmanship or materials will be repaired or replaced at the option of Coverplay, Inc. without charge for materials or labor, to the original owner for as long as the spa shall remain in this registered owners' possession. **Freight not included, non-transferable.**

Exceptions:

- a) Defects in or due to a component or part which was not designed by Coverplay Inc. nor intended to be a component of the **COVER•UP X** cover removal system.
- b) Failure to provide reasonable and necessary care and or maintenance.**
- c) Misuse, abuse, negligence, accident, natural event, or any unauthorized alteration.
- d) Natural wear of the components due to the prescribed and intended use, and any expected environmental factors.
- e) Damage by water permeated covers

Neither Coverplay, Inc. nor any of its representatives will be responsible for any consequential damage or incidental expenses resulting from any breach of this warranty. This warranty gives you specific rights and you may have additional rights which vary from state to state.

Except as herein provided, there shall be no additional warranty obligations expressed either orally, or implied.

COVER•UP X is not designed for damaged or water permeated covers.

To validate, fill out the warranty card and send it to:


Coverplay, Inc.
3100 Merriman Road
Medford, OR 97501

Copyright © 2007 - Coverplay, Inc.
All rights reserved.



Tenth Anniversary Edition

Easy Installation Guide

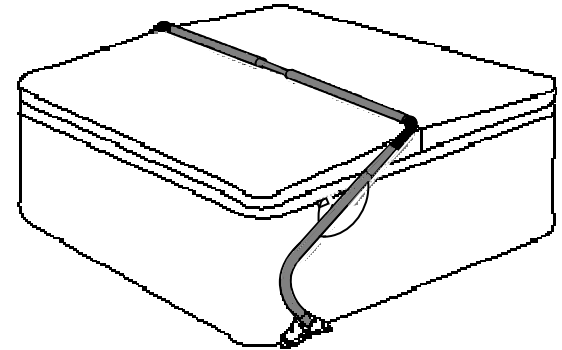

U.S. Patent Nos. 5,974,599 - 6,158,063
Copyright © 2007 - Coverplay, Inc.